


Q clamp

Product Guide






101

SIZES


- 1
- 2
- 3
- 4
- 5



104

SIZES


- 1
- 2
- 3
- 4
- 5



116

SIZES

- 1
- 2
- 3
- 4
- 5



119

SIZES

- 1
- 2
- 3
- 4
- 5




40°-70°

123

SIZES


- 4



125

SIZES


- 1
- 2
- 3
- 4
- 5



126

SIZES


- 2
- 3
- 4



127

SIZES


- 2
- 3
- 4



128

SIZES


- 1
- 2
- 3
- 4



129

SIZES

- 2
- 3
- 4



30°-45°

130

SIZES


- 2
- 3
- 4



131

SIZES


- 1
- 2
- 3
- 4
- 5



132

SIZES

- 1
- 2
- 3
- 4
- 5

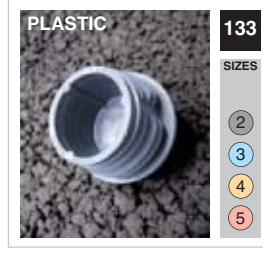

PLASTIC

133

SIZES


- 2
- 3
- 4
- 5



134

SIZES

- 2
- 3
- 4

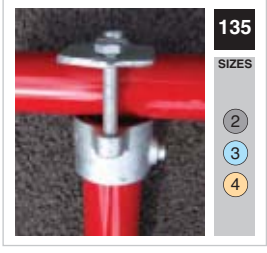

135

SIZES


- 2
- 3
- 4



138

SIZES

- 1
- 2
- 3
- 4

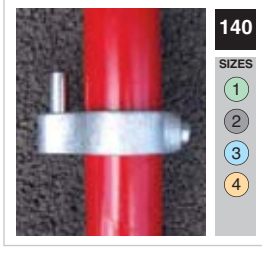

140

SIZES

- 1
- 2
- 3
- 4



143

SIZES

- 1
- 2
- 3
- 4



144

SIZES

- 2
- 3
- 4



145

SIZES

- 2
- 3
- 4



146

SIZES

- 2
- 3
- 4



147

SIZES

- 2
- 3
- 4



148

SIZES

- 2
- 3
- 4



149

SIZES


- 2
- 3
- 4
- 5



150

SIZES


- 2
- 3
- 4

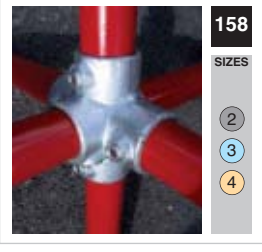

158

SIZES


- 2
- 3
- 4

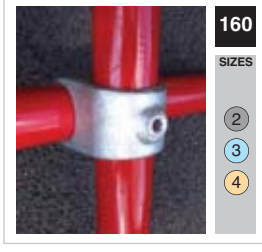

160

SIZES

- 2
- 3
- 4

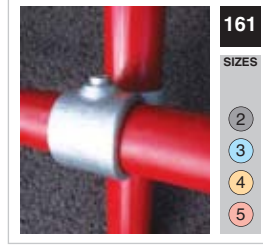

161

SIZES


- 2
- 3
- 4
- 5



161

SIZES


- 4
- 2
- 4
- 3

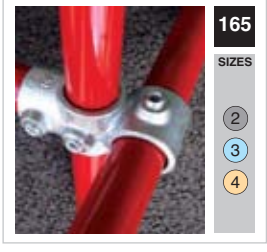

165

SIZES


- 2
- 3
- 4

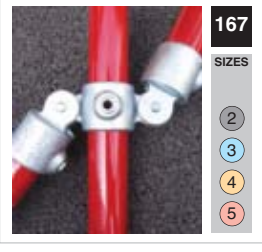

167

SIZES


- 2
- 3
- 4
- 5

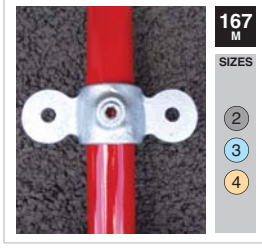

167 M

SIZES

- 2
- 3
- 4

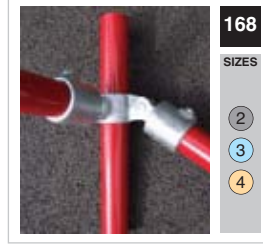

168

SIZES











- 2
- 3
- 4



168 M

SIZES


- 2
- 3
- 4

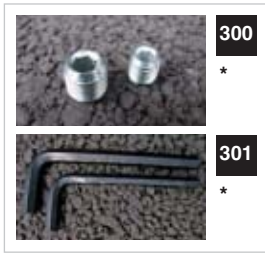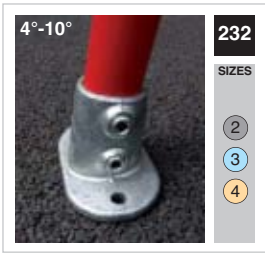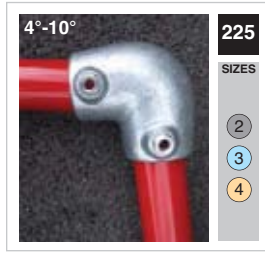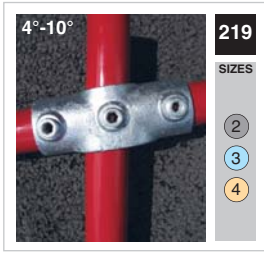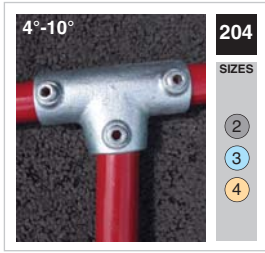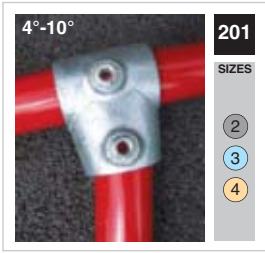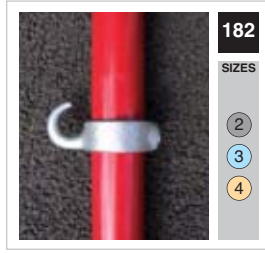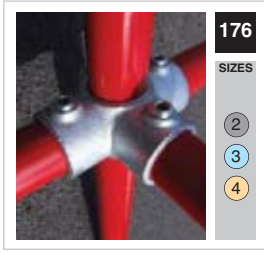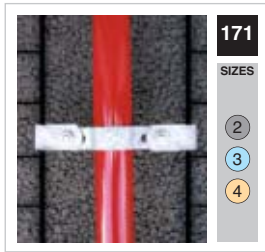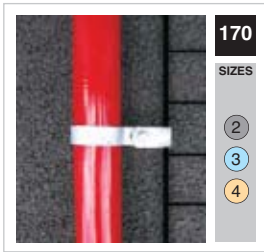

GALVANISED TUBE IN LENGTHS OF 3.25 AND 6.5 METRES.



*Image shows 2 fittings

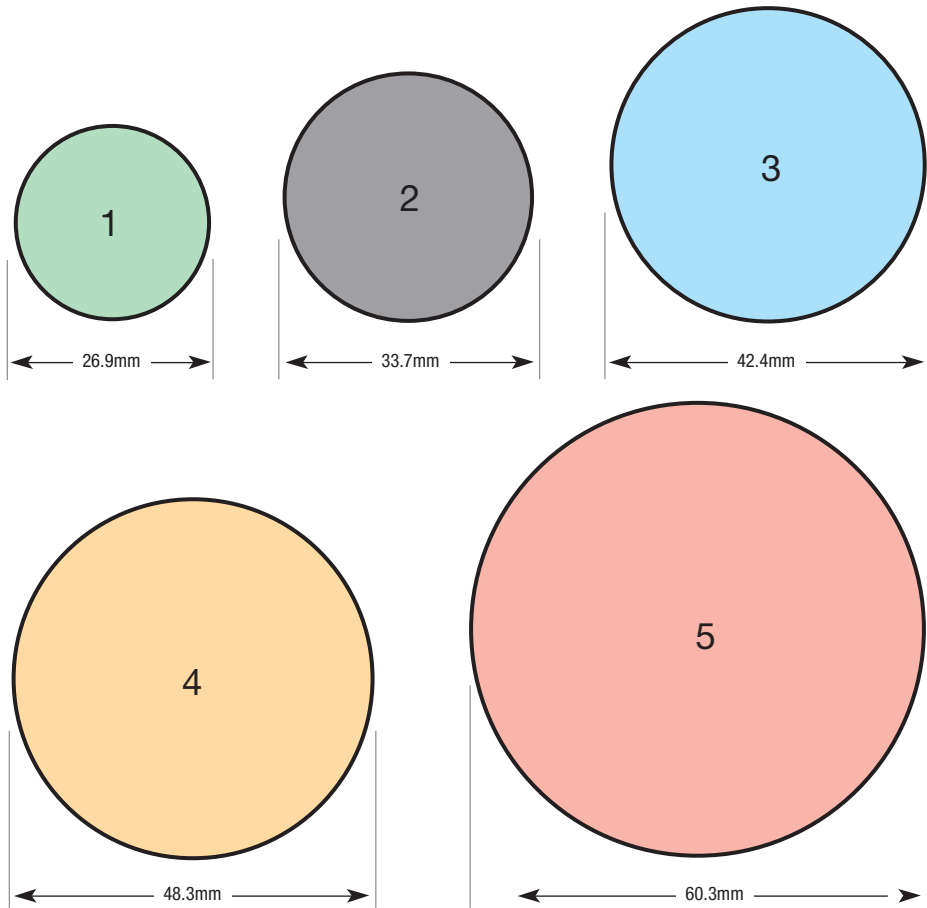


GALVANISED BLACKHEART MALLEABLE IRON FITTINGS TO BS6681, GRADE B32-10 WITH GALVANISING TO BS EN 1461:1999

TABLE OF SIZES		
	TUBE DIA MM O/D	NOMINAL BORE
1	26.9	3/4"
2	33.7	1"
3	42.4	1 1/4"
4	48.3	1 1/2"
5	60.3	2"



Your local Q clamp dealer is:

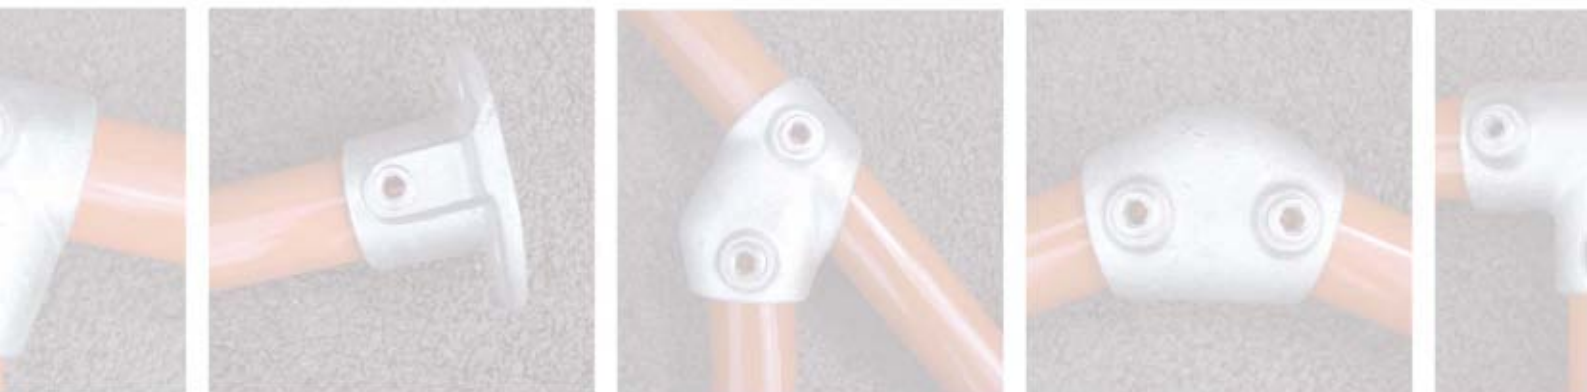

Q clamp

NOTE: The standard finish is hot-dipped galvanised.

Q clamps are also available in self colour condition (as cast), epoxy or polyester powder coated in a range of colours. Whilst every care has been taken to ensure that the information given in this manual is correct, we reserve the right to alter and revise this information as and when they consider it necessary. This is in-line with their policy of research and development.